



James Ridsdale

Managing Director I james@datajar.co.uk



Mark Tsuchihasi

Sales Director I mark@datajar.co.uk



Ben Toms

Technical Director | ben@datajar.co.uk



Richard Mallon

Systems Engineer I richard@datajar.co.uk





More Slackin'






* Slack

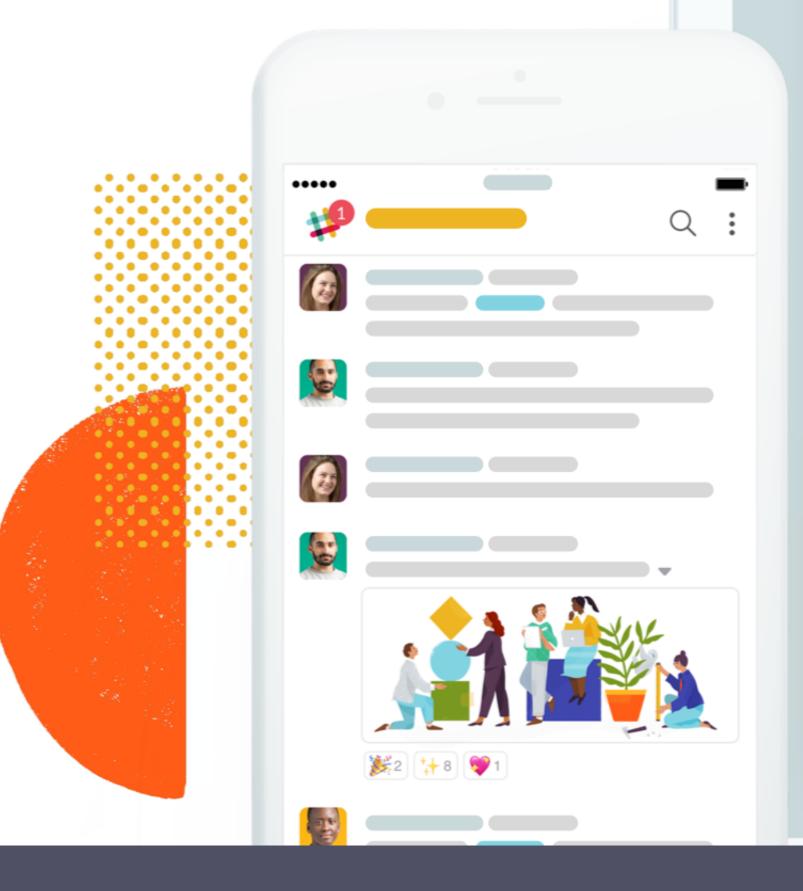

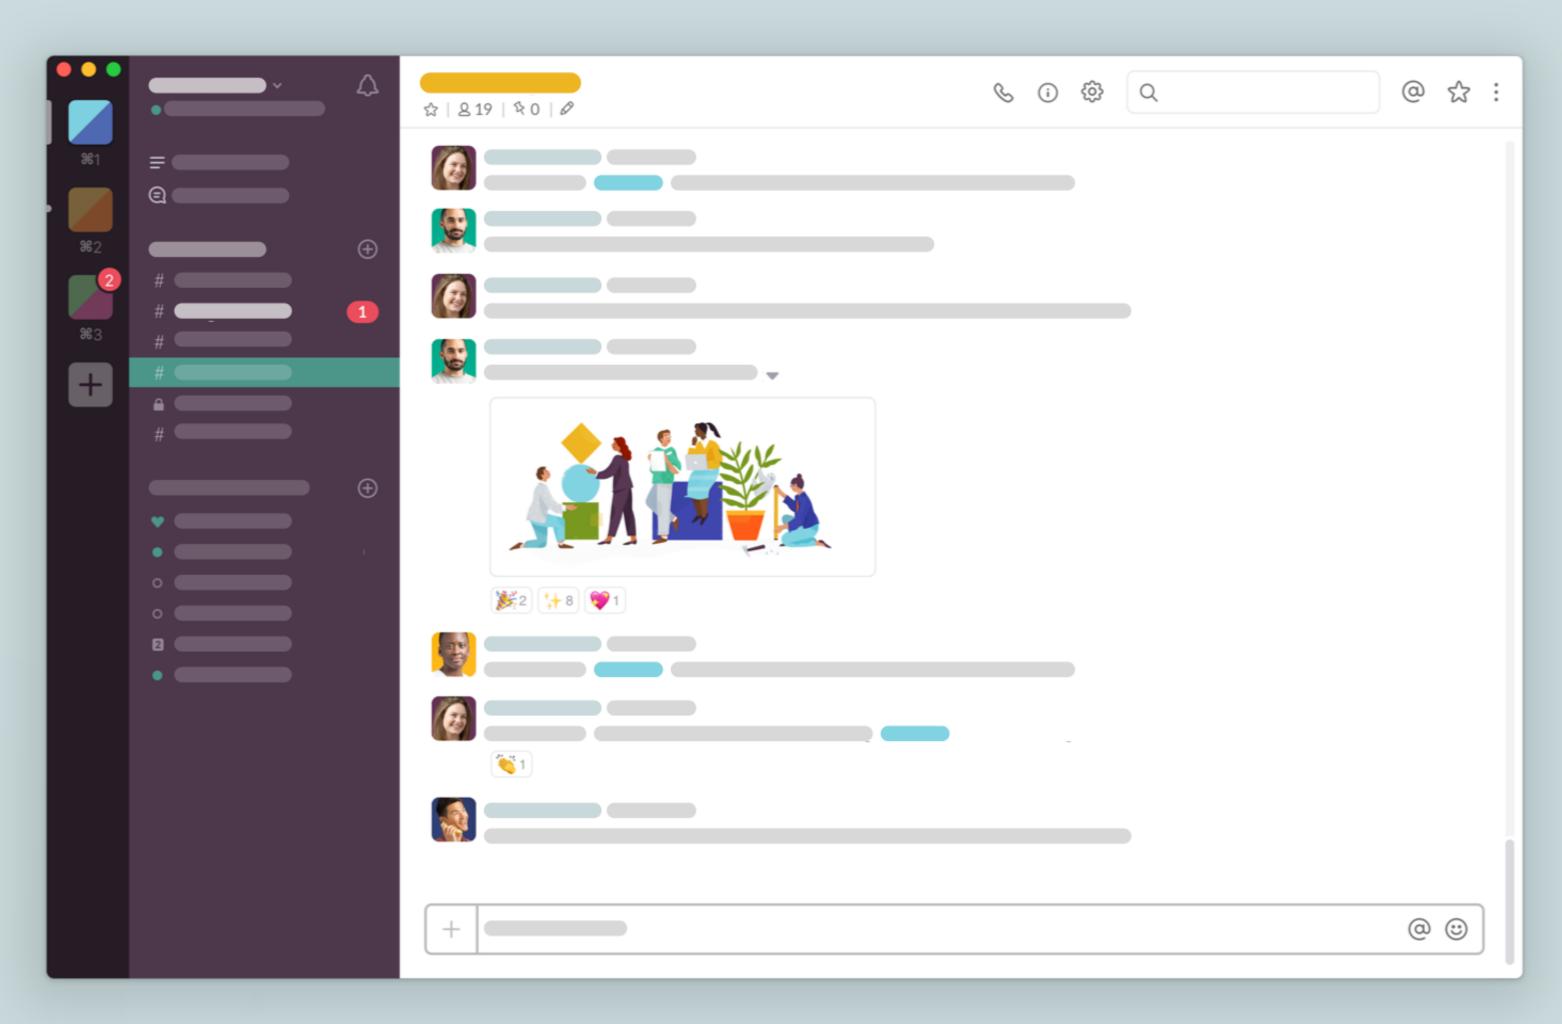





Notifications

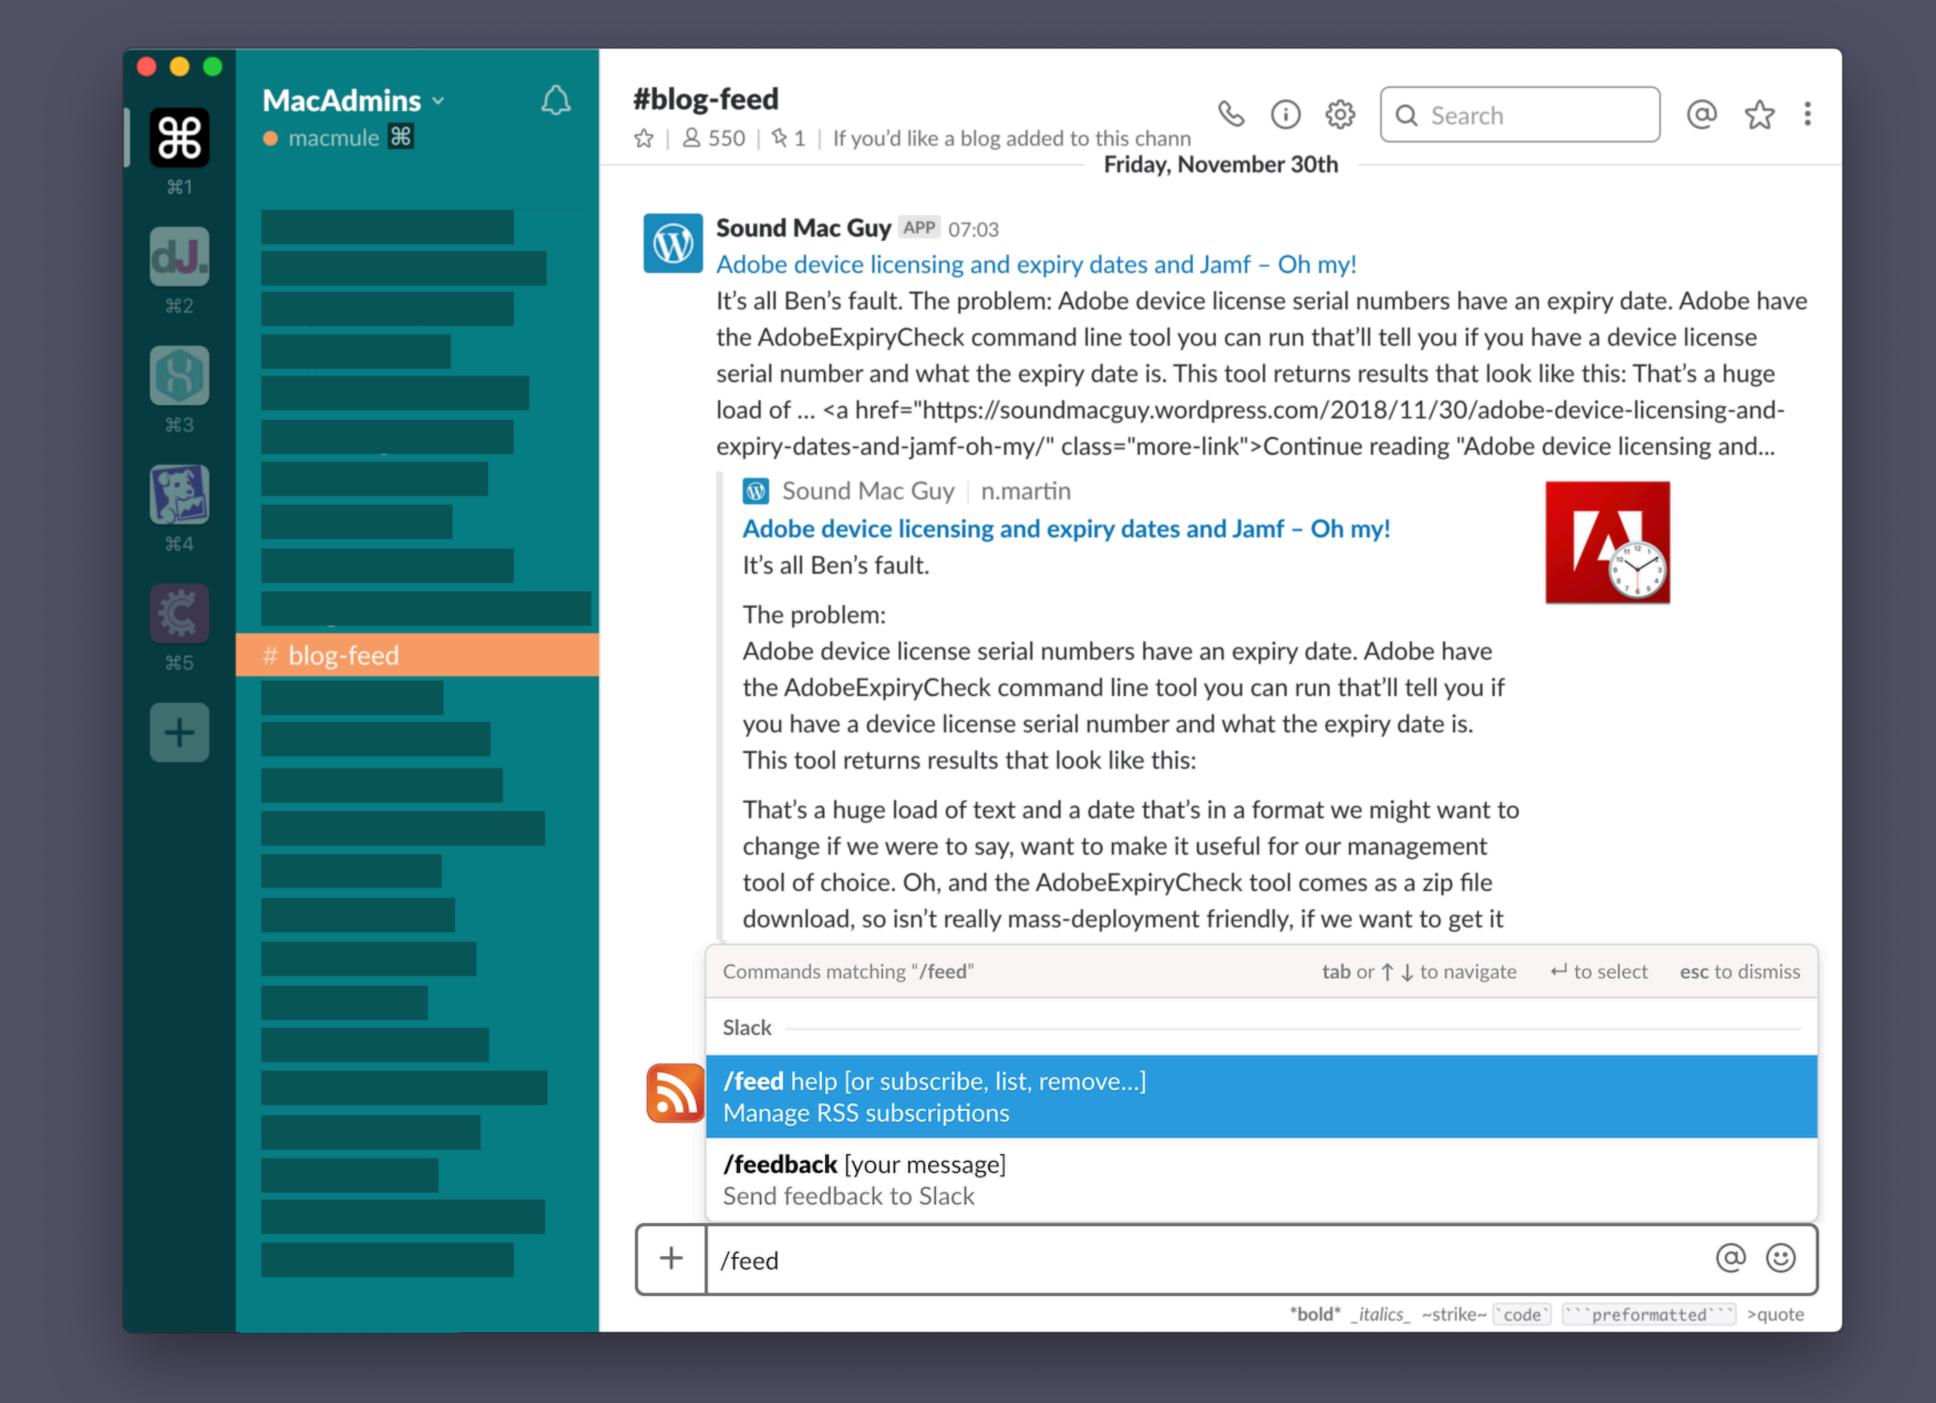




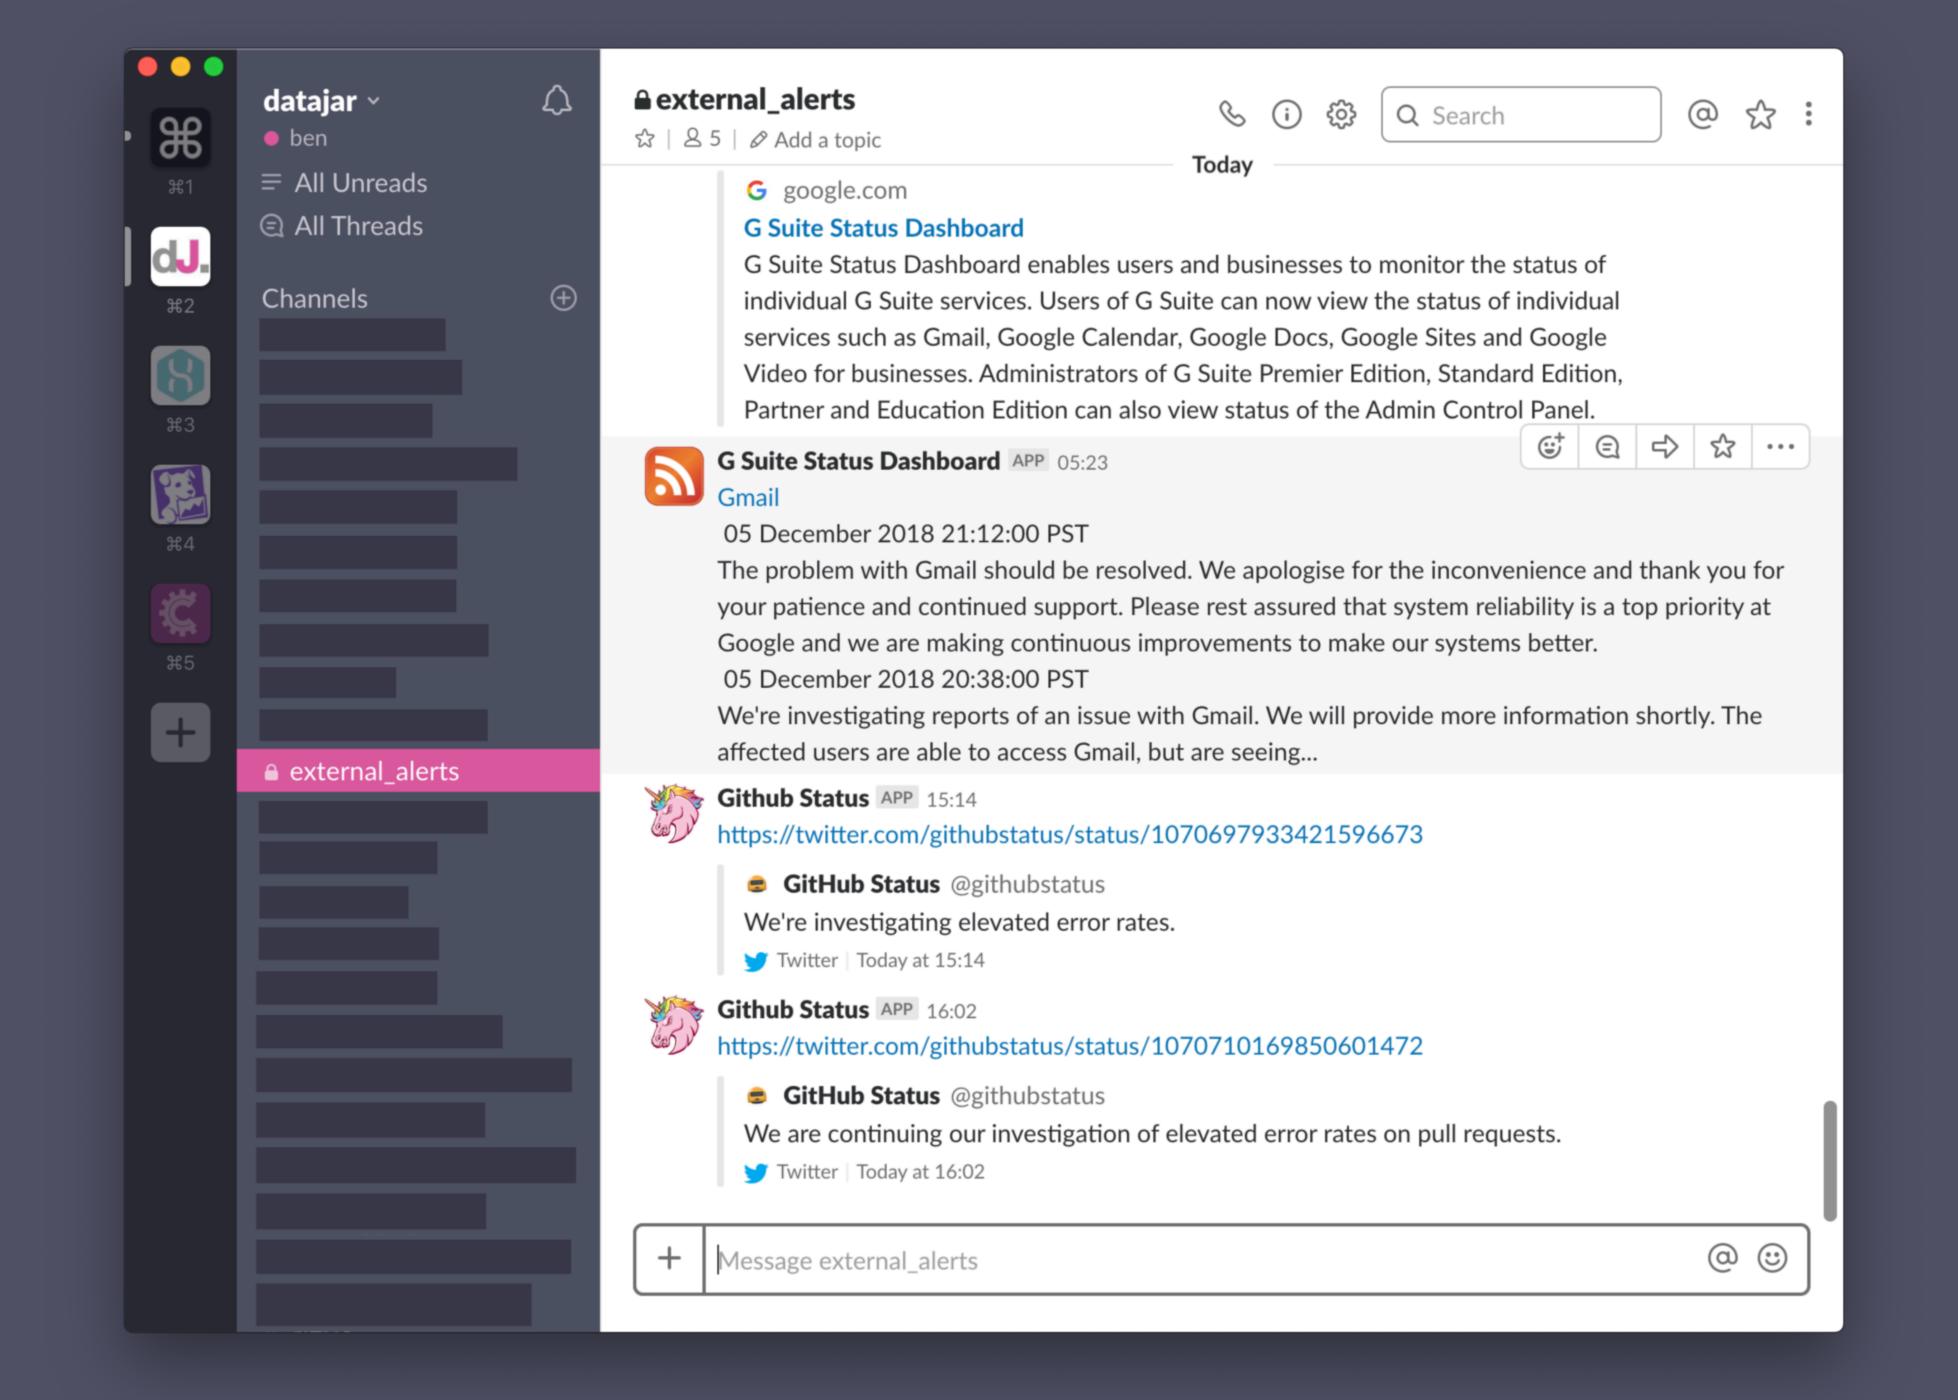


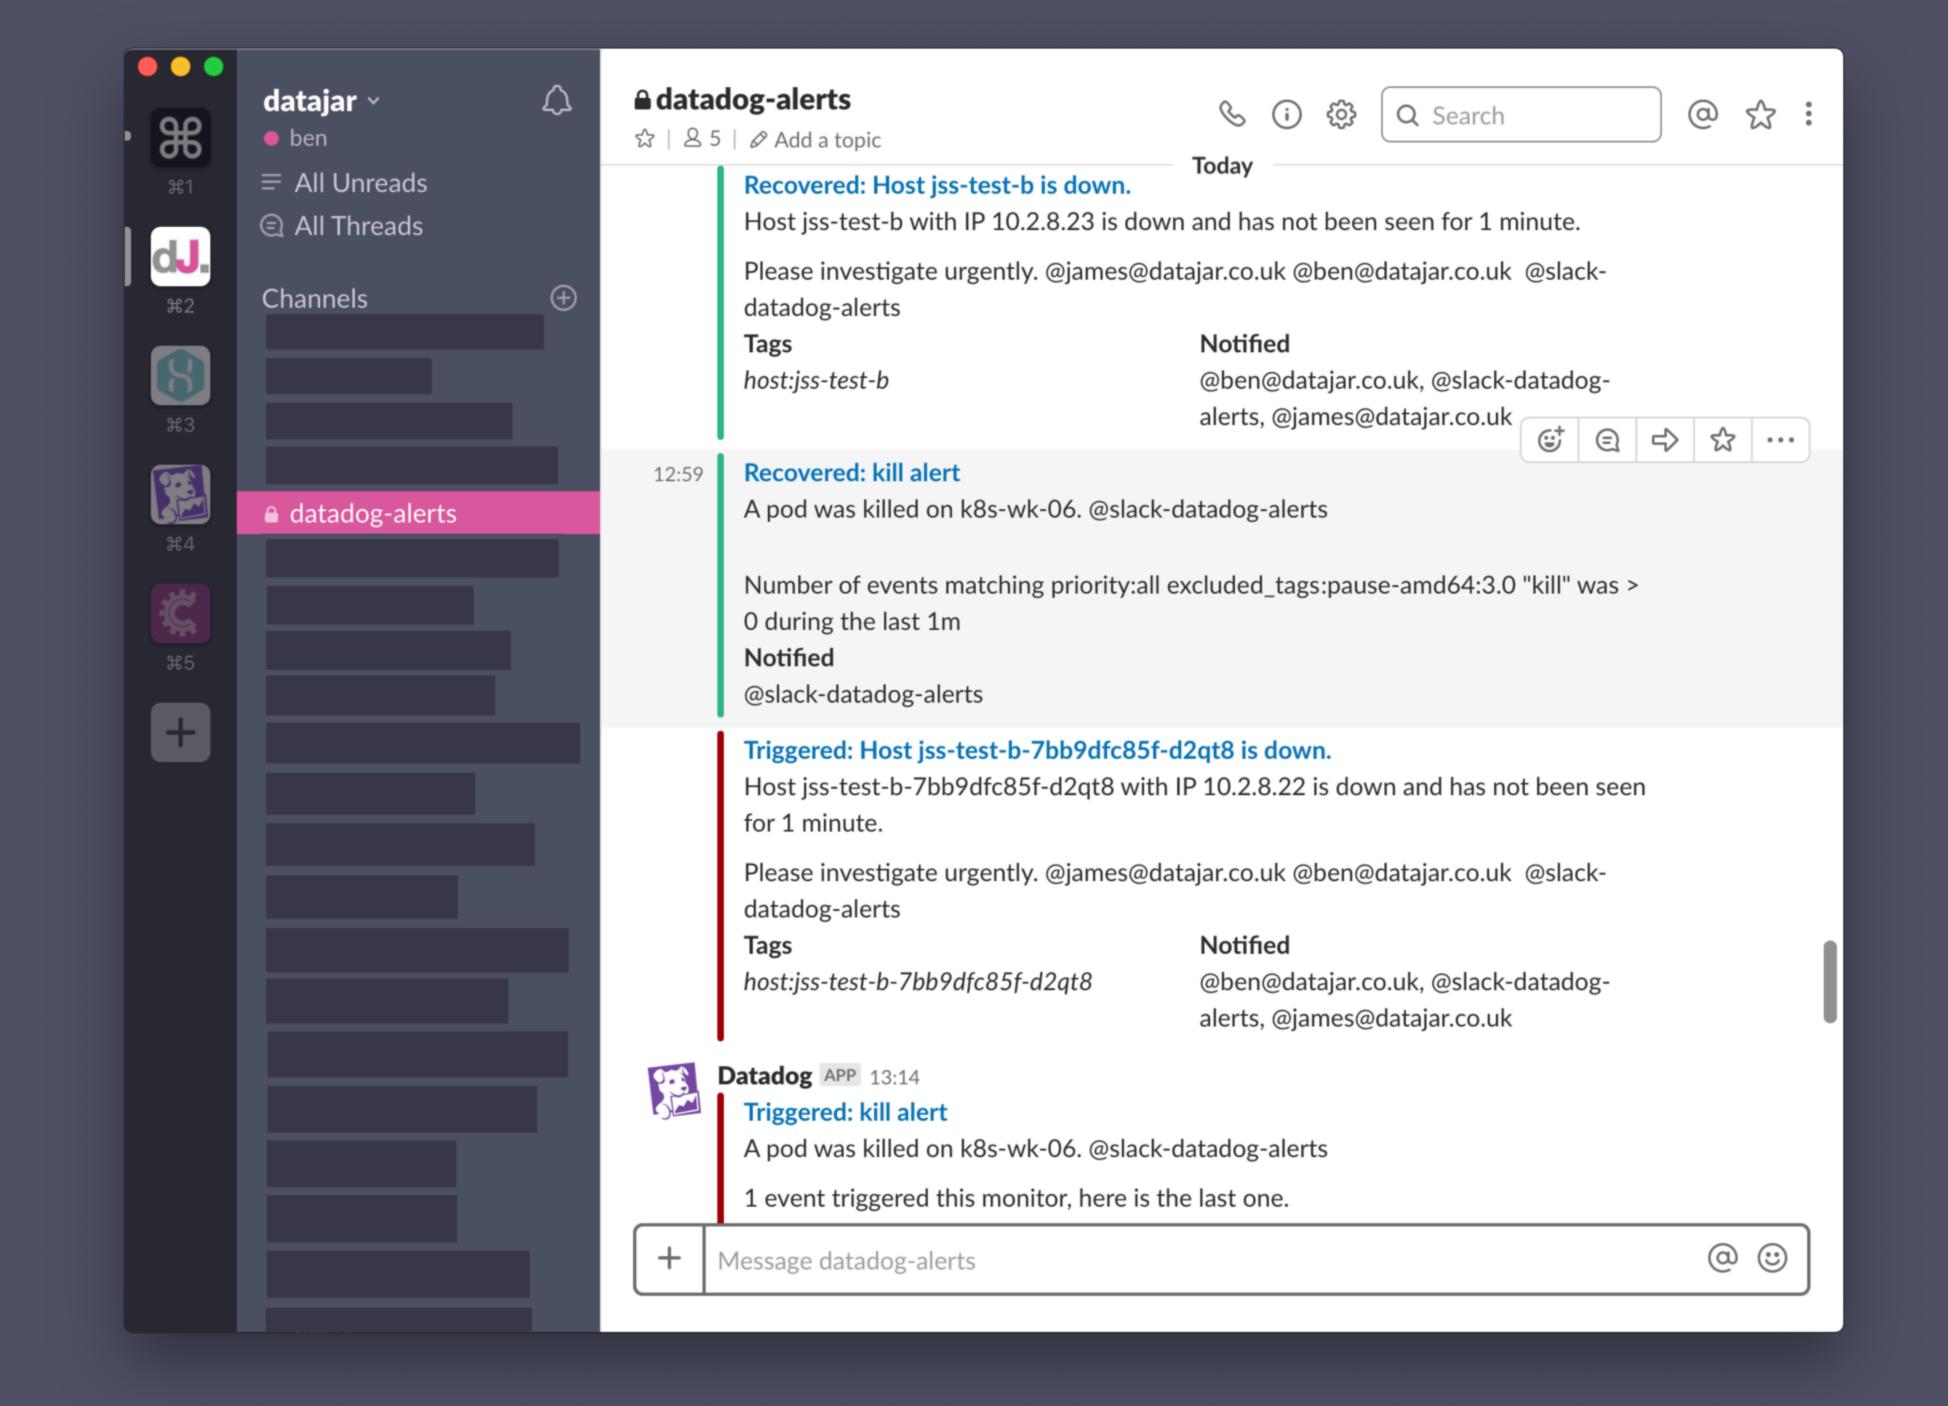



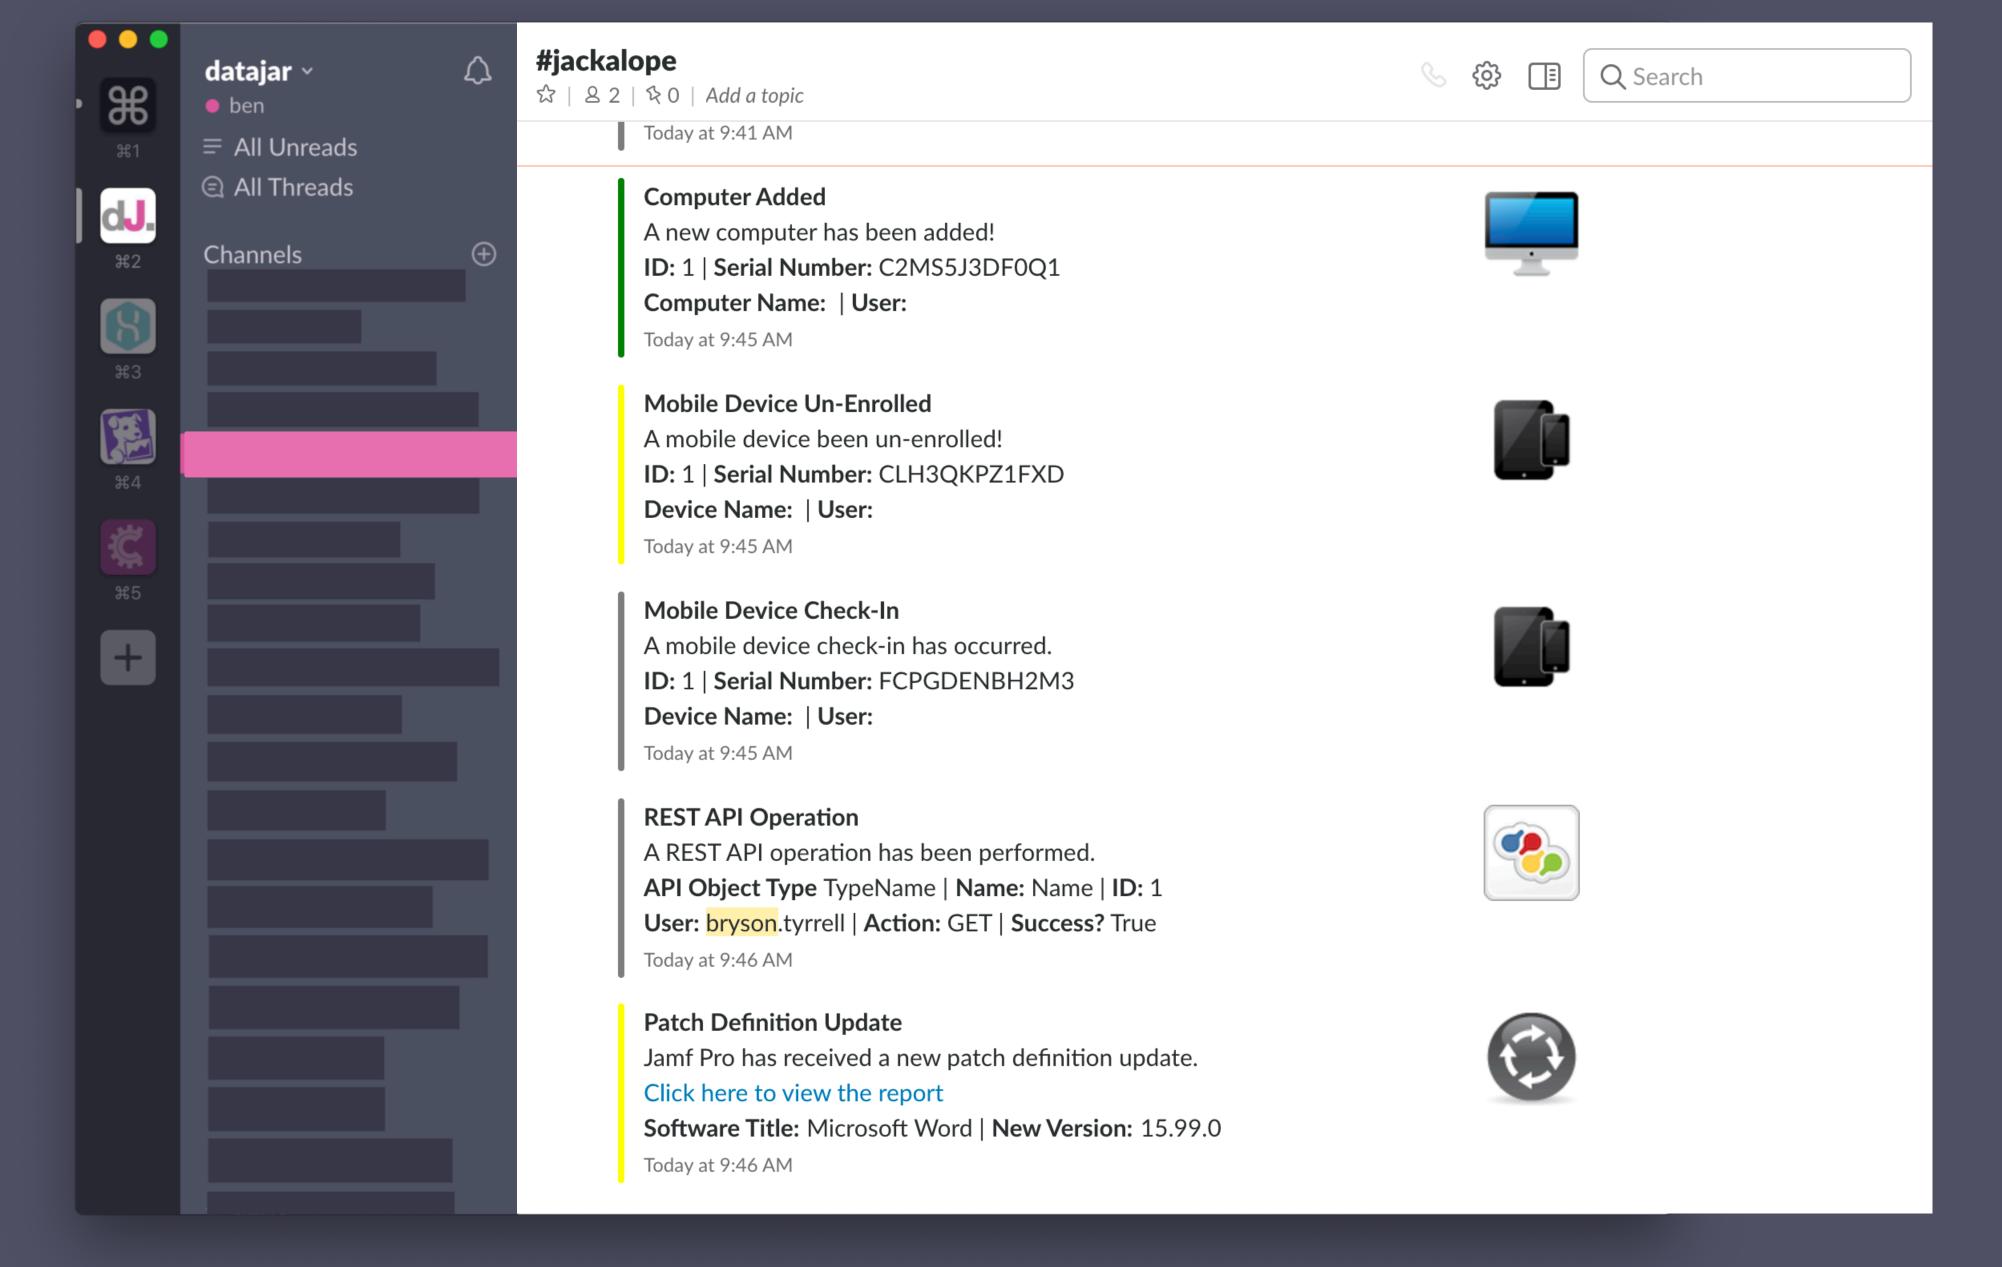


jackalope-slack.readthedocs.io

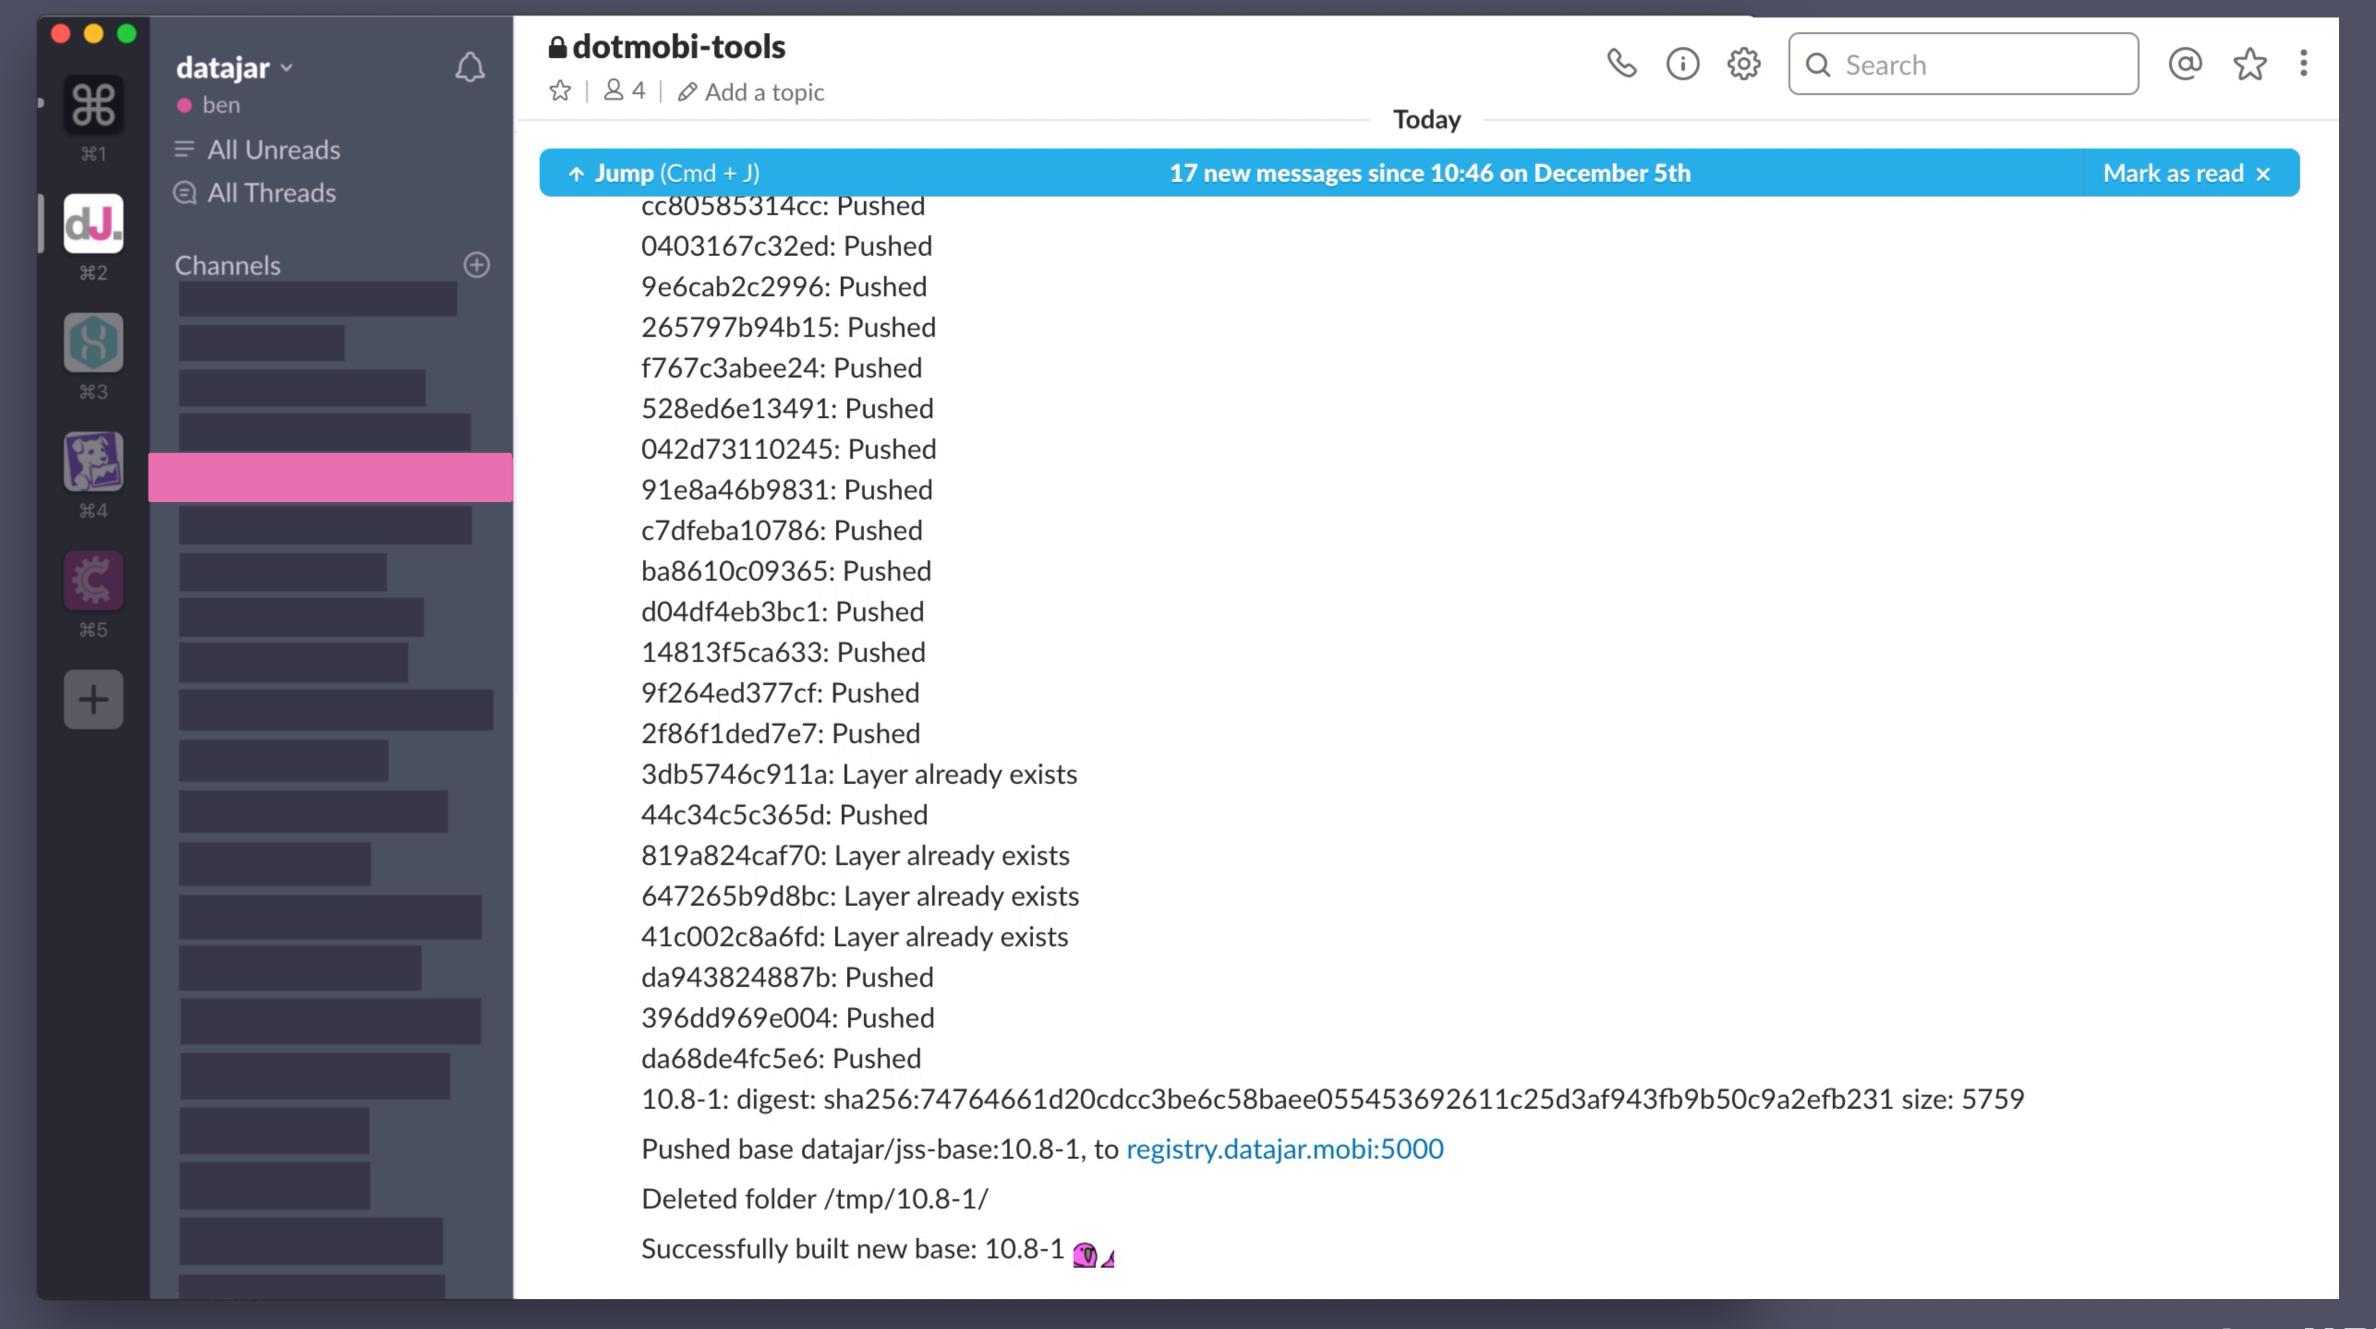

```
Raw
      1.1.1
      This is an example of how to send data to Slack webhooks in Python with the
      requests module.
      Detailed documentation of Slack Incoming Webhooks:
      https://api.slack.com/incoming-webhooks
 6
      \mathbf{I} \cdot \mathbf{I} \cdot \mathbf{I}
      import json
 10
      import requests
11
      # Set the webhook_url to the one provided by Slack when you create the webhook at https://my.slack.com/services/new/incoming-
 12
13
      slack_data = {'text': "Sup! We're hacking shit together @HackSussex :spaghetti:"}
14
15
      response = requests.post(
 16
         webhook_url, data=json.dumps(slack_data),
17
         headers={'Content-Type': 'application/json'}
18
 19
      if response.status_code != 200:
 20
21
          raise ValueError(
 22
              'Request to slack returned an error %s, the response is:\n%s'
             % (response.status_code, response.text)
23
24
```

bit.ly/2E5kinm



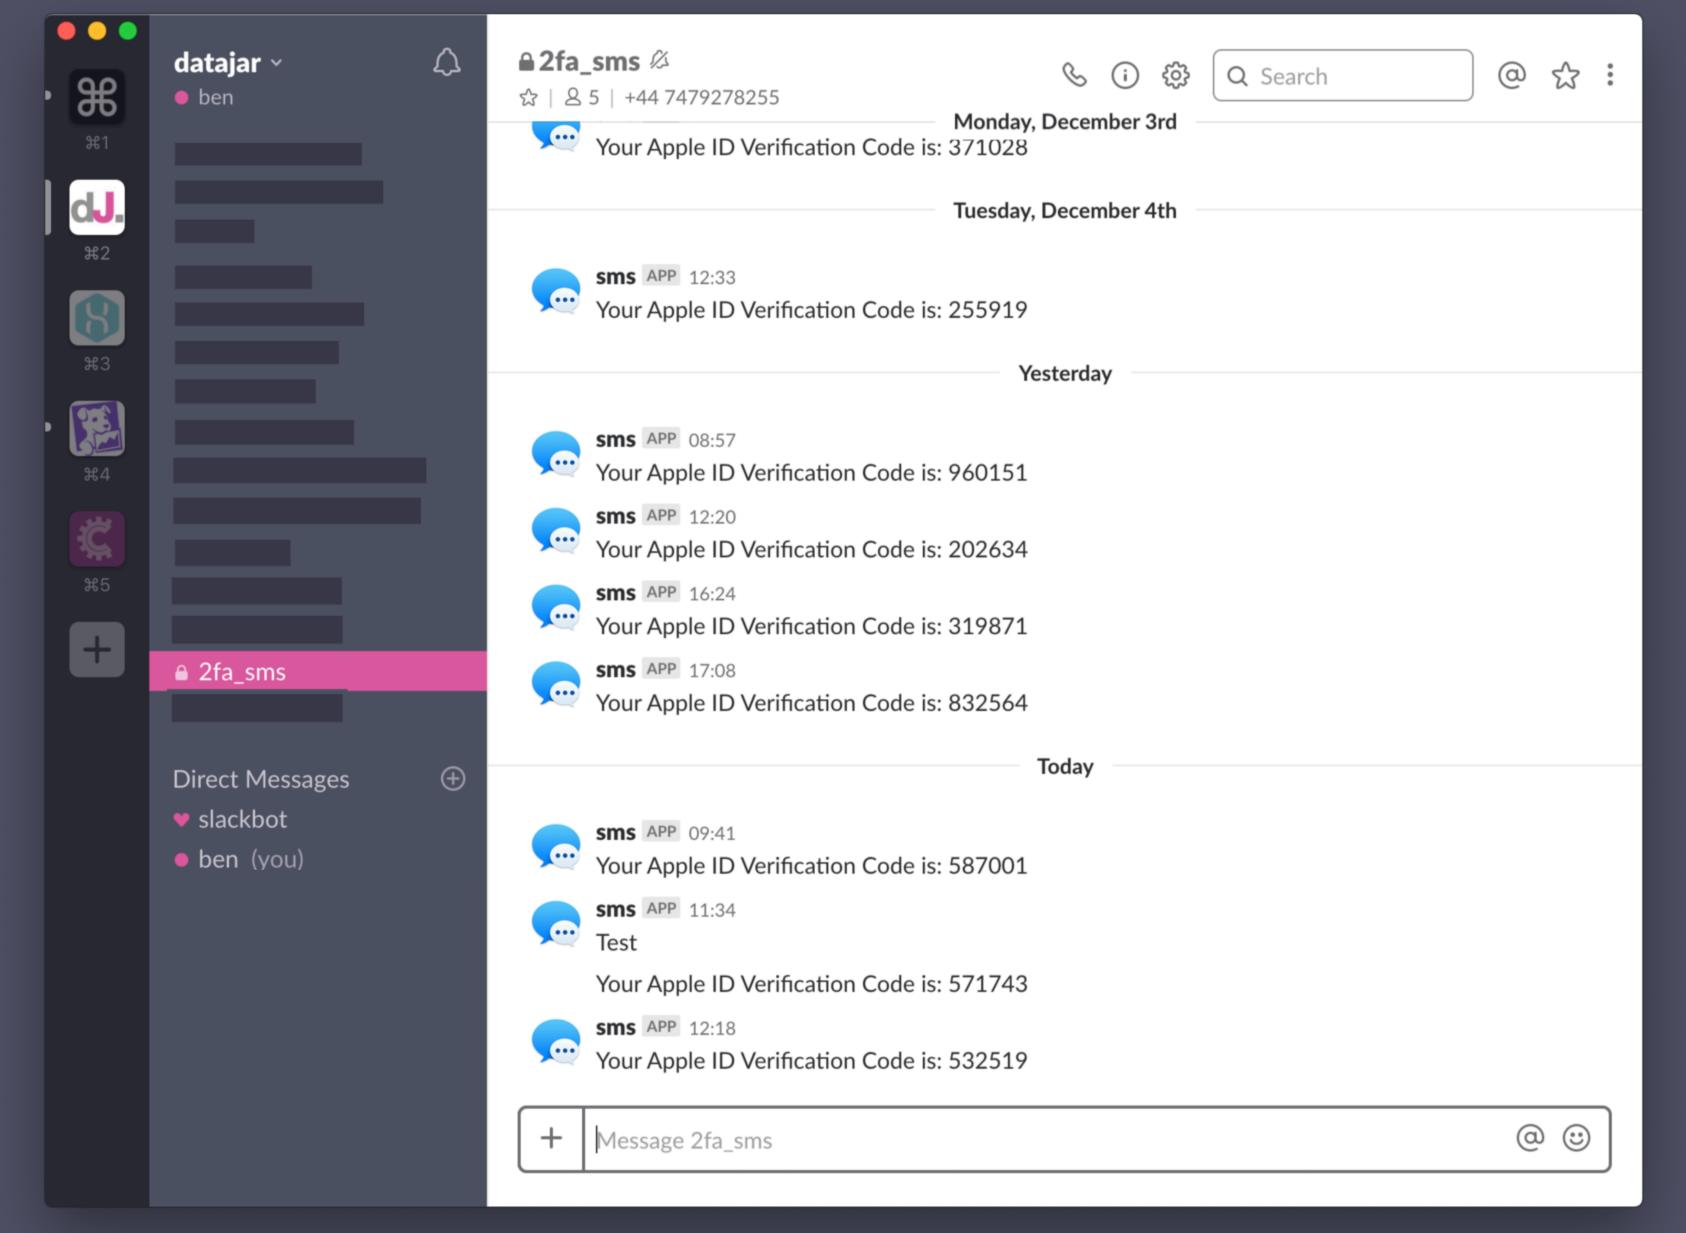

www.twilio.com/docs/studio/tutorials/how-to-post-sms-to-slack



